

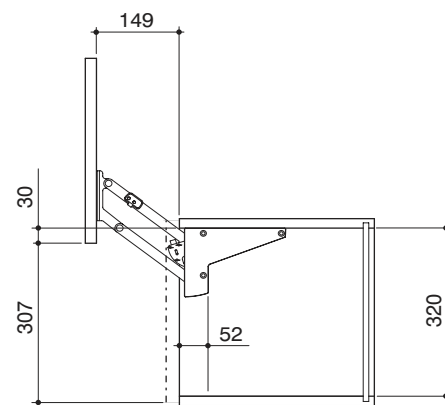


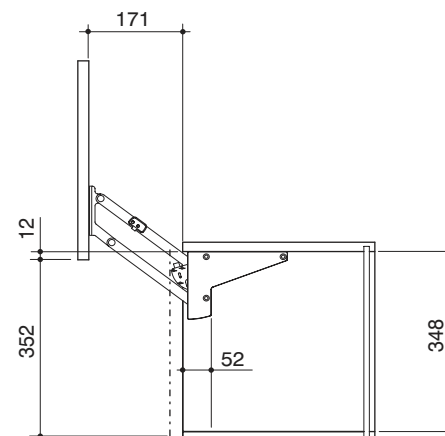



| Kg MIN |  | Kg MAX |             |      |
|--------|--|--------|-------------|------|
| 0      |  | 6      | VRVR3602064 | 200N |
| 4      |  | 7.5    | VRVR3602564 | 250N |
| 6      |  | 9      | VRVR3603064 | 300N |
| 8      |  | 11     | VRVR3603564 | 350N |
| 9.5    |  | 13.5   | VRVR3604064 | 400N |
| 12     |  | 14.5   | VRVR3604564 | 450N |
| 13     |  | 15.5   | VRVR3605064 | 500N |
| 14     |  | 17     | VRVR3605564 | 550N |
| 15     |  | 18     | VRVR3606064 | 600N |


**VELA 39**


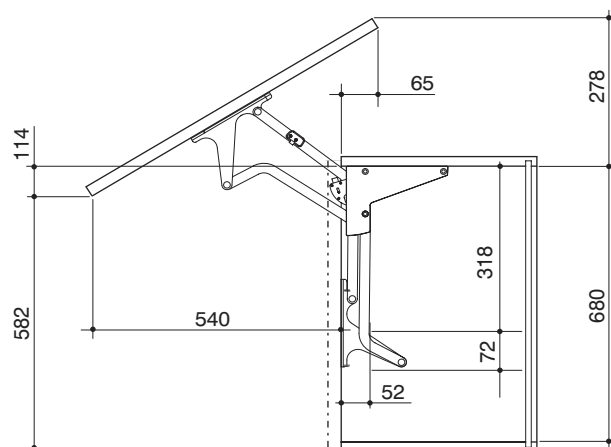
| Kg MIN |  | Kg MAX |             |      |
|--------|--|--------|-------------|------|
| 0      |  | 4.5    | VRVR3902064 | 200N |
| 4      |  | 6      | VRVR3902564 | 250N |
| 5      |  | 7.5    | VRVR3903064 | 300N |
| 6.5    |  | 9      | VRVR3903564 | 350N |
| 8      |  | 10     | VRVR3904064 | 400N |
| 9      |  | 12     | VRVR3904564 | 450N |
| 11     |  | 13     | VRVR3905064 | 500N |
| 12     |  | 14,5   | VRVR3905564 | 550N |
| 13     |  | 16     | VRVR3906064 | 600N |

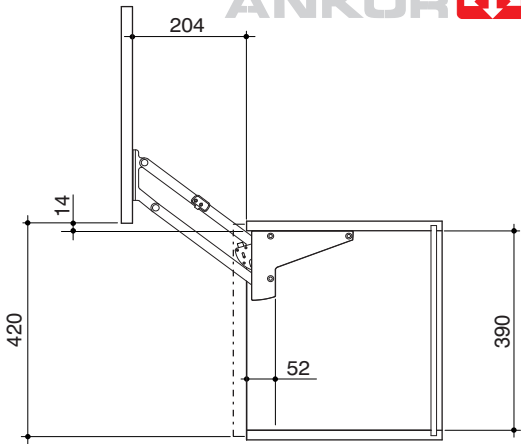


|  |        |  |      |
|-----------------------------------------------------------------------------------|--------|------------------------------------------------------------------------------------|------|
| Kg MIN                                                                            | Kg MAX |                                                                                    |      |
| 0                                                                                 | 4.5    | VRVR4402064                                                                        | 200N |
| 3.5                                                                               | 5.5    | VRVR4402564                                                                        | 250N |
| 4.5                                                                               | 6.5    | VRVR4403064                                                                        | 300N |
| 5.5                                                                               | 8      | VRVR4403564                                                                        | 350N |
| 7                                                                                 | 9.5    | VRVR4404064                                                                        | 400N |
| 8                                                                                 | 10.5   | VRVR4404564                                                                        | 450N |
| 9.5                                                                               | 11.5   | VRVR4405064                                                                        | 500N |
| 10.5                                                                              | 12.5   | VRVR4405564                                                                        | 550N |
| 11.5                                                                              | 13.5   | VRVR4406064                                                                        | 600N |

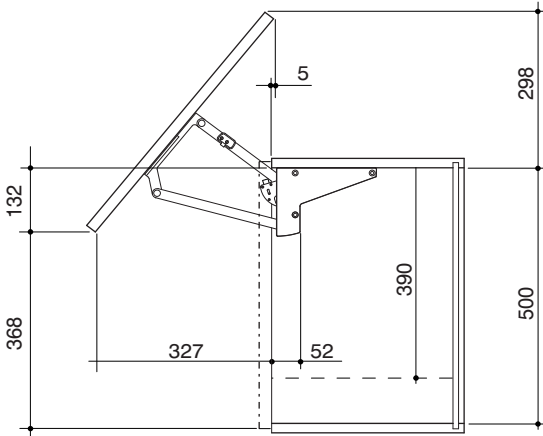

|  |        |  |      |
|-------------------------------------------------------------------------------------|--------|--------------------------------------------------------------------------------------|------|
| Kg MIN                                                                              | Kg MAX |                                                                                      |      |
| 0                                                                                   | 5      | VROR5402064                                                                          | 200N |
| 4.5                                                                                 | 7      | VROR5402564                                                                          | 250N |
| 5.5                                                                                 | 8      | VROR5403064                                                                          | 300N |
| 7                                                                                   | 9.5    | VROR5403564                                                                          | 350N |
| 8.5                                                                                 | 11.5   | VROR5404064                                                                          | 400N |
| 10.5                                                                                | 13     | VROR5404564                                                                          | 450N |
| 12                                                                                  | 14     | VROR5405064                                                                          | 500N |
| 13                                                                                  | 15     | VROR5405564                                                                          | 550N |
| 14                                                                                  | 16.5   | VROR5406064                                                                          | 600N |



|  |        |  |  |  |
|-----------------------------------------------------------------------------------|--------|------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|
| Kg MIN                                                                            | Kg MAX |                                                                                    |  |                                                                                     |
| 0                                                                                 | 3.5    | VROR7202064                                                                        |  | 200N                                                                                |
| 3.5                                                                               | 4.5    | VROR7202564                                                                        |  | 250N                                                                                |
| 4                                                                                 | 5.5    | VROR7203064                                                                        |  | 300N                                                                                |
| 5                                                                                 | 7      | VROR7203564                                                                        |  | 350N                                                                                |
| 6.5                                                                               | 8      | VROR7204064                                                                        |  | 400N                                                                                |
| 7.5                                                                               | 9      | VROR7204564                                                                        |  | 450N                                                                                |
| 8.5                                                                               | 10.5   | VROR7205064                                                                        |  | 500N                                                                                |
| 9.5                                                                               | 12     | VROR7205564                                                                        |  | 550N                                                                                |
| 11                                                                                | 13.5   | VROR7206064                                                                        |  | 600N                                                                                |

**Per applicazioni speciali contattare l'Ufficio Tecnico**

For special applications please contact our technical department

Für Sonderanwendungen bitte unsere Konstruktionsabteilung kontaktieren

Pour les applications spéciales, prière de contacter notre service technique

Para aplicaciones especiales contactar con la Oficina Técnica