


Vite a testa cilindrica larga con cava a croce

**UNI 7687
DIN 7985**

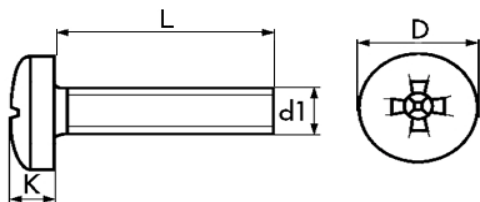

d1	D	cava PH	K (max)
M3	5,70 - 6,00	1	2,52
M4	7,64 - 8,00	2	3,25
M5	9,64 - 10,00	2	3,95
M6	11,57 - 12,00	3	4,75
M8	15,57 - 16,00	4	6,15